


Size Tam.	Nom. Torque (Nm)	Max. Torque (Nm)	Rot. max. (rpm)	d		D ₁	D ₂	L	I	l ₁	l ₂	S	Weight Peso (kg)
				min	max								
24	45	90	12000	9	30	55	48	66	14	24	18	2,0	0,8
28	65	130	10300	9	35	62	54	76	18	28	20	2,0	1,1
32	100	200	9200	10	40	70	60	86	22	32	22	2,0	1,6
38	200	400	7600	10	45	84	70	100	27	38	24	2,5	2,7
42	270	540	7100	10	50	92	75	110	31	42	26	2,5	3,4
48	385	770	6200	10	56	105	84	124	36	48	28	2,5	5,0
55	515	1030	5400	13	65	120	98	140	43	55	30	3,0	7,4
60	665	1330	4900	13	70	130	105	152	47	60	32	3,0	9,4
65	910	1820	4500	13	75	142	112	165	51	65	35	3,0	11,9
75	1440	2880	3900	32	85	165	128	190	59	75	40	3,5	17,5
85	2020	4040	3500	42	97	185	146	214	68	85	44	3,5	24,5



Misalignment Desalinhamento	Size Tamanho	24	28	32	38	42	48	55	60	65	75	85
Radial Y (mm)		0,6	0,8	0,8	0,8	0,8	1,2	1,2	1,2	1,2	1,5	1,5
Axial ± x (mm)		0,5	0,5	0,6	0,7	0,8	0,8	0,9	1,0	1,1	1,2	1,3
Angular α (°)		1,5	1,5	1,5	1,5	1,5	1,2	1,2	1,2	1,2	1,2	1,2
"l ₂ " (mm)		18	20	22	24	26	28	30	32	35	40	44

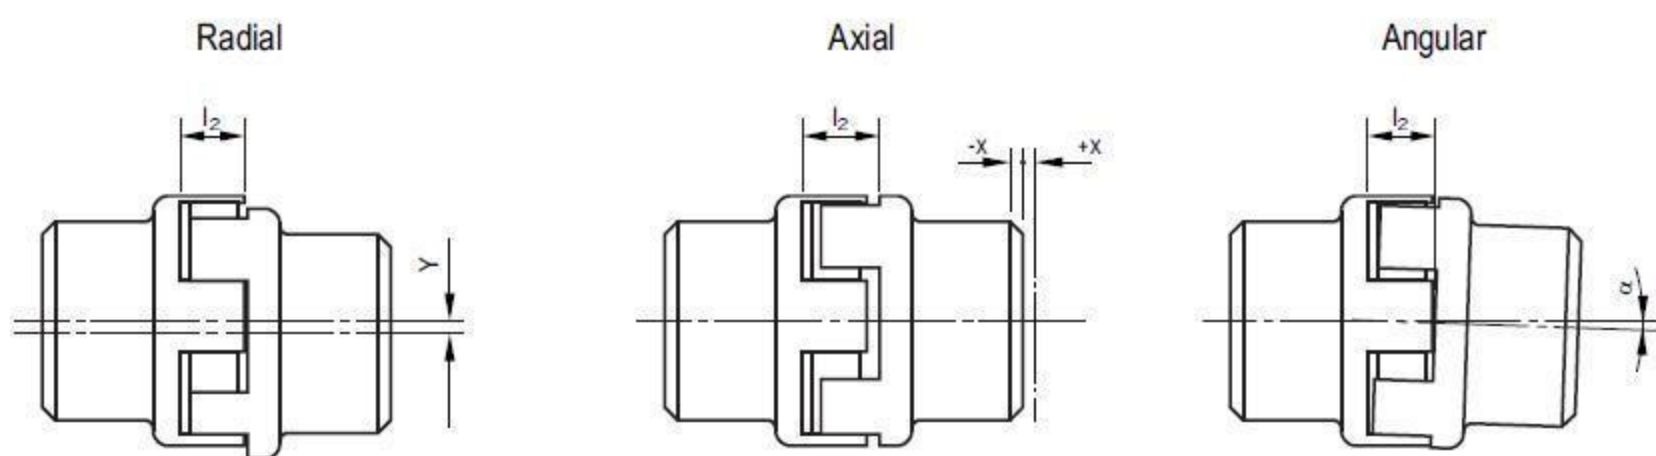